



**Van Nuys Awning Co.**  
Established 1918, Over 90 Years of Service

# SELECT

- ✓ AWNING
- ✓ OPEN ROLLER
- ✓ FOLDING ARM

*Triangular torsion mounting  
bar awning with  
many optional upgrades*



Finely Crafted with:

**STOBAG**  
Premium Swiss Quality 



**Van Nuys Awning Co.**

Established 1918, Over 90 Years of Service

818-782-8607 \* 310-472-5262 \* 323-873-3331 Fax 818-782-6837

5661 SEPULVEDA BLVD., VAN NUYS, CA 91411

<http://www.vannuysawning.com/>






- ★ OPTIONAL OMBRAMATIC FEATURE CONTROLS PITCH ADJUSTMENT FOR BOTH FOLDING ARMS AT THE SAME TIME
- ★ COMPACT UNIT PROFILE
- ★ OPTIONAL DROP DOWN RETRACTABLE VALANCE PROVIDES PROTECTION FROM LOW ANGLE SUN AND ADDITIONAL PRIVACY




# SELECT

## BUCKLING DEPTHS ON FOLDING ARMS

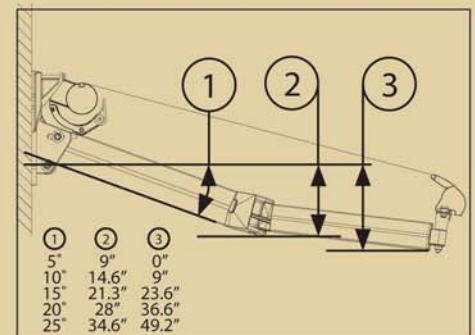

## WALL FIX REQUIRED SPACE

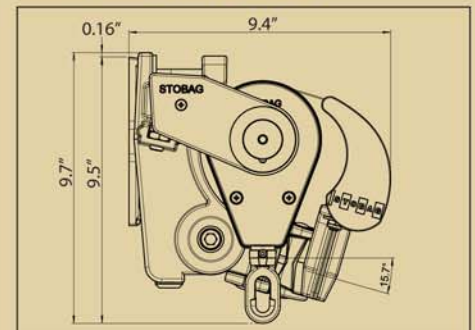

## PRODUCT SPECIFICATIONS

<b>Linear Width</b>	Standard: 5'-6" – 40'-0", Ombramatic: 7'-4" – 19'-0"
<b>Projections*</b>	3'-4", 4'-11", 6'-6", 5'-9", 8'-2", 9'-10", 11'-5", 13'-1"
<b>Frame Finish</b>	Polyester Powder Coated
<b>Frame Colors</b>	White <span style="display: inline-block; width: 15px; height: 15px; background-color: white; border: 1px solid black;"></span> Ivory <span style="display: inline-block; width: 15px; height: 15px; background-color: #f0f0f0; border: 1px solid black;"></span> Sand <span style="display: inline-block; width: 15px; height: 15px; background-color: #f5f5dc; border: 1px solid black;"></span> Bronze <span style="display: inline-block; width: 15px; height: 15px; background-color: #8b4513; border: 1px solid black;"></span>
<b>Mounting Options</b>	Wall, Soffit, Roof, Rafter
<b>Roller Tube</b>	78 mm
<b>Torsion Bar</b>	Triangular
<b>Pitch Adjustment</b>	0° – 60°
<b>Fabric Protection</b>	Optional Hood with Side Covers
<b>Mode Of Operation</b>	Manual Geiger Bevel Gear or Somfy Motor
<b>Retractable Valance</b>	Manual - 8' Drop
<b>Fabric Options</b>	100% Solution Dyed Acrylics
<b>Valance Options</b>	9 standard choices or dealer custom design
<b>Warranty</b>	10 year limited hardware warranty

\*Ombramatic projections limited to 6'-6" – 11'-5"